



CURVED LICENSE PLATE MOUNT 3163

PARTS INCLUDED

- 1 License Plate Frame
- 1 Back Plate
- 1 Hardware Kit
 - 2 Foam Adhesive Pads
 - 4 1/4-20 x 7/16" Cap Screws
 - 1 Alcohol Pad
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Hex Wrenches, Socket Set with Ratchet, Combination Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

STEP 2 The stock license plate holder is attached to the rear light bar. See PIC 1. Remove the two fasteners securing the light bar to the fender. The fasteners are under the fender.

STEP 3 Remove the two fasteners securing the stock license plate holder to the light bar. See PIC 2. Remove the license plate from the stock license plate holder.

STEP 4 The slotted edge of the curved license plate frame must face upward to fit around the mounting tab of the back plate. See PIC 3.



CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY
Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including preassembled) are tightened before operation of the motorcycle. Kuryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

STEP 5 Place the 1/2" Bumper Pads between the bottom edge of new Back Plate and the rear fender. Clean and dry the rear fender where the Bumper Pad will be installed. Peel the adhesive tape backing from the Bumper Pads, stack one on top of the other and stick to the fender.

NOTE The bumper pads are provided to avoid excess vibration of the plate mount. The bump pads may fit tightly when stacked and put in place behind the plate mount.

STEP 6 Place the license plate into the curved license plate frame. Place the frame over the back plate and secure the frame to the back plate with the supplied fasteners.


STEP 7 Secure the license plate assembly to the light bar with the stock fasteners. Replace the light bar on the rear fender and secure with the stock hardware.

NOTE If the license plate rattles in the frame, apply the supplied self-adhesive foam tape to the back plate. This will reduce the space between the license plate and back plate, eliminating any rattling.


Ride On!

Kuryakyn[®]

PIC. 2

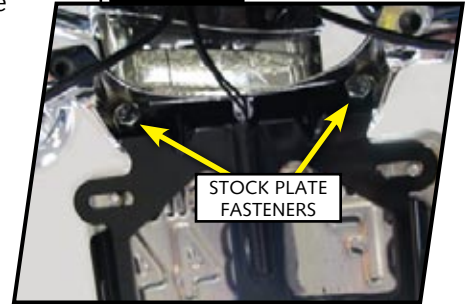

PIC. 3

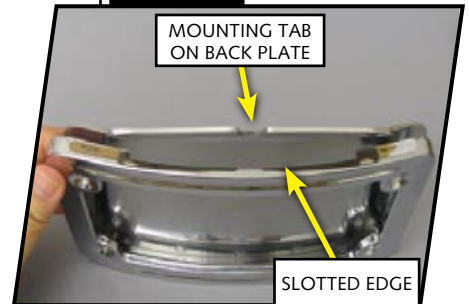

PIC. 4



PAGE

2