

CIRO CLAMP MOUNT


Parts Included:

) Ciro Clamp Kit

-) Clamp Right Half
-) Clamp Left Half
- 1 1/4-20x3/4" **Bolt**
-) Threaded Ball Post
- *1 Reducer Ring (*7/8"-1" Kits Only)

Installation Instructions:

- 1. Park on a level surface and shub off the motorcycle. Ensure that the engine has time to cool before installation.
- 2. (OPTIONAL STEP) If you are using the clamp with 7/8" bars, snap the reducer ring around the bar.
- 3. Assemble clamp halves around the bar and insert the 1/4-20 bolt through both halves. Thread the ball post on to the bolt aligning the flat spot toward the hinge of the clamp.

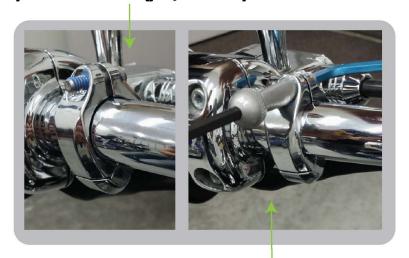

4. Tighten the clamp to the bar using a 3/16" allen in the bolt, and head of the stud. Tighten to 24-26 in-lbs. DO NOT OVER-TIGHTEN!

*DO NOT USE LIQUID THREAD-LOCKER WITH THIS PRODUCT

*If you have purchased any Ciro accessories to go with your ball mount, please refer to those instructions to complete your installation.

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Ciro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

Ciro products are designed

NOTE:

and manufactured under very strict avality control. Ciro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 [three] years from the date of purchase, and a lifetime warranty against LED failure. Ciro will have no obligation if the customer cannot show proof of purchase. Warranty will not be granted unless the part is properly installed and maintained. Ciro will not be liable for any

non-Ciro products.
Please visit our website
Ciro3d.com for our complete
warranty policy.

consequential and incidental damages, including labor, or

CIRO,3D.COM



CIRO DRINK HOLDER

Parts Included:

Drink Holder Assembly

Installation Instructions:

1. Remove the large plastic nut from your drink holder and slide it over the Ciro ball mount with the threads facing outward.



2. Snap your drink holder onto the ball and thread the large plastic nut back onto the drink holder. Adjust the angle, tighten it down, and you are ready to go.



WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Giro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

Ciro products are designed

NOTE:

and manufactured under very strict quality control. Ciro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a lifetime warranty against LED failure. Ciro will have no obligation if the customer cannot show proof of purchase. Warranty will not be granted unless the part is properly installed and maintained. Ciro will not be liable for any consequential and incidental damages, including labor, or non-Ciro products. Please visit our website Ciro3d.com for our complete warranty policy.