

Ref: **BSLi-03** (12V 3Ah)

SPECIFICATIONS

Model No.	BSLi-03	
Dimensions	Length	134mm
	Width	65mm
	Height	92mm
Weight	0.78kg	

CHARACTERISTICS


Nominal Voltage	12V	
Capacity	3Ah	
Nominal Power	36Wh	
Internal Resistance	<10mΩ	
Working Voltage	10V~14.4V	
Operating Temperature Range	Charge	0°C ~ +45°C
	Discharge	-20°C ~ +55°C
	Storage	0°C ~ 30°C
Charge Current (A)	1.5A(0.5C) , Max. 6A(2C)	
Charge Retention	30 days > 97%	
Discharge	Continuous	120A (40C)
	Maximum	210A(70C) ≤15S
CCA (-18°C storage for 20h)	90A(30C) ≤15S	
Cycle Life	2000 cycles	




REPLACEMENTS

BT7B-4	BTX7A-BS	BTX9-BS
BT9B-4	BT7B-BS	BB9-B
BTX7A	BT9B-BS	12N9-4B-1

DRAWINGS

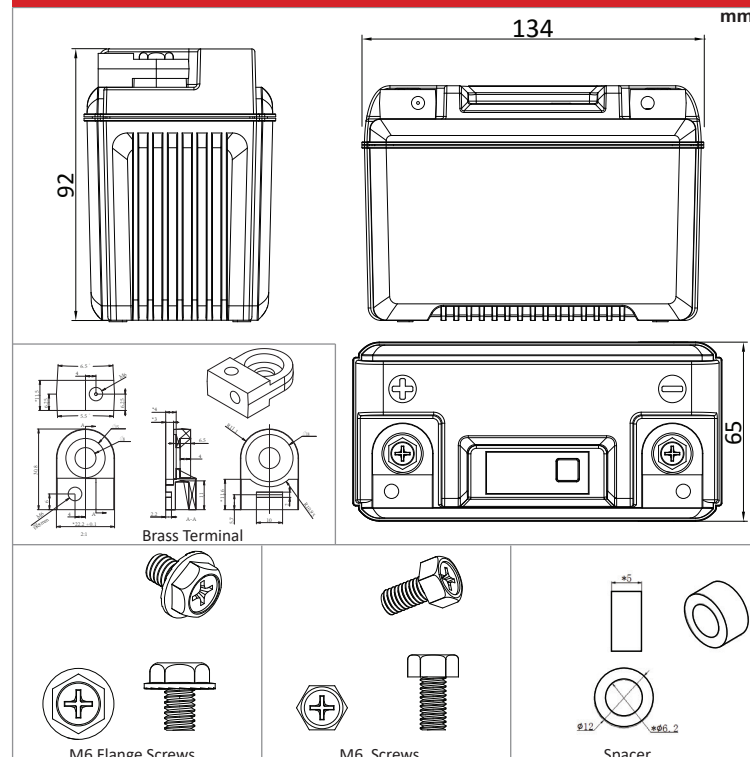

DISCHARGING GRAPH

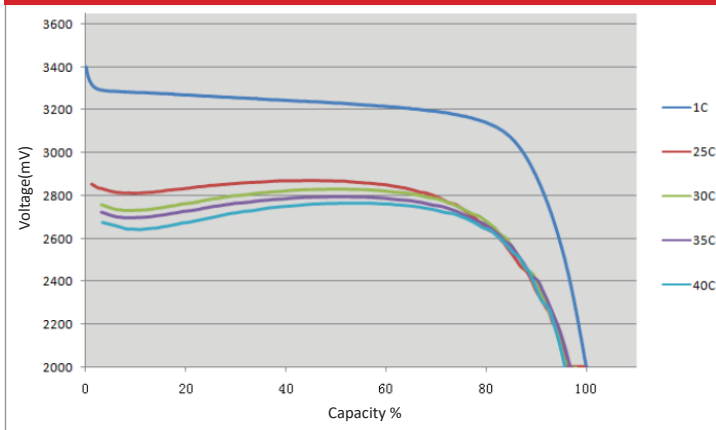

CERTIFICATIONS

UN3480