

Ref: **BSLi-12** (12V 8Ah)

SPECIFICATIONS

Model No.	BSLi-12	
Dimensions	Length	165mm
	Width	86mm
	Height	130mm
Weight	1.60kg	

CHARACTERISTICS


Nominal Voltage	12V	
Capacity	8Ah	
Nominal Power	96Wh	
Internal Resistance	<10mΩ	
Working Voltage	10V~14.4V	
Operating Temperature Range	Charge	0°C ~ +45°C
	Discharge	-20°C ~ +55°C
	Storage	0°C ~ 30°C
Charge Current (A)	4A(0.5C) , Max. 16A(2C)	
Charge Retention	30 days > 97%	
Discharge	Continuous	320A (40C)
	Maximum	440A(55C) ≤15S
CCA (-18°C storage for 20h)	240A(30C) ≤15S	
Cycle Life	2000 cycles	




REPLACEMENTS

BTX30L-BS	B60-N24AL-B	52515	BTX18L
BB30L-B	12N24-3A	53030	BTX20L
BB30CL-B	12N24-3	BTX16L	BTX30L

DRAWINGS

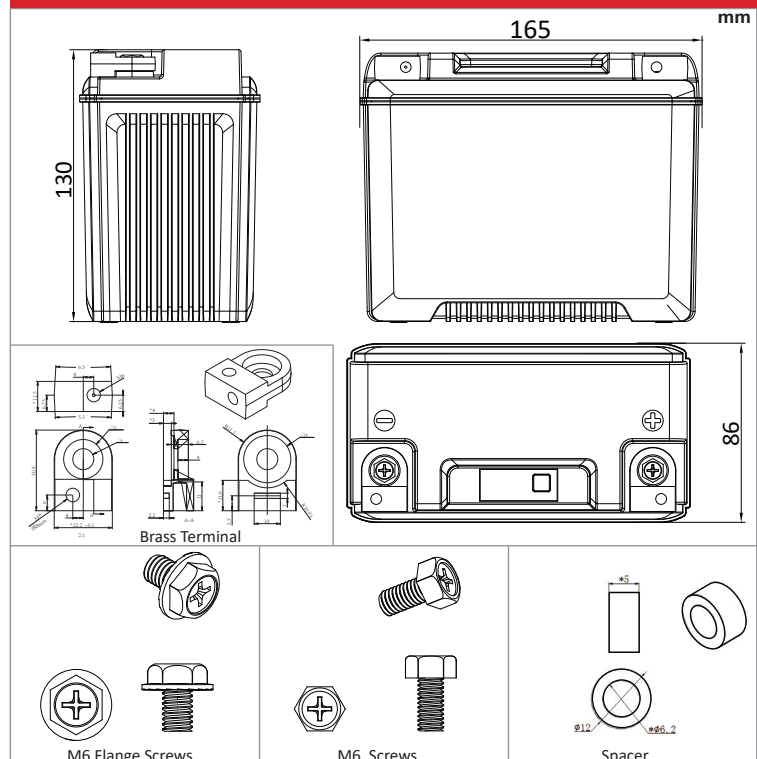

DISCHARGING GRAPH

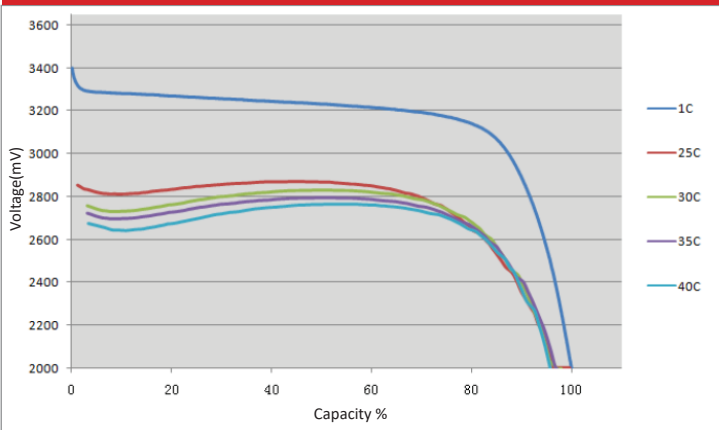

CERTIFICATIONS

UN3480