

Ref: **BSLi-02** (12V 2Ah)

SPECIFICATIONS

Model No.	BSLi-02	
Dimensions	Length	107mm
	Width	56mm
	Height	85mm
Weight	0.55kg	

CHARACTERISTICS


Nominal Voltage	12V	
Capacity	2Ah	
Nominal Power	24Wh	
Internal Resistance	<12mΩ	
Working Voltage	10V~14.4V	
Operating Temperature Range	Charge	0°C ~ +45°C
	Discharge	-20°C ~ +55°C
	Storage	0°C ~ 30°C
Charge Current (A)	1A(0.5C) , Max. 4A(2C)	
Charge Retention	30 days > 97%	
Discharge	Continuous	80A (40C)
	Maximum	140A(70C) ≤15S
CCA (-18°C storage for 20h)	60A(30C) ≤15S	
Cycle Life	2000 cycles	



REPLACEMENTS

BTZ5S	BTZ7S-BS	BB4L-B	12N5-3B
BTZ7S	BTX4L-BS	BB5L-B	12N5.5-3B
BTX4L	BTX5L-BS	BB6.5L-B	12N7-3B
BTX5L	BTX7L-BS		

DISCHARGING GRAPH

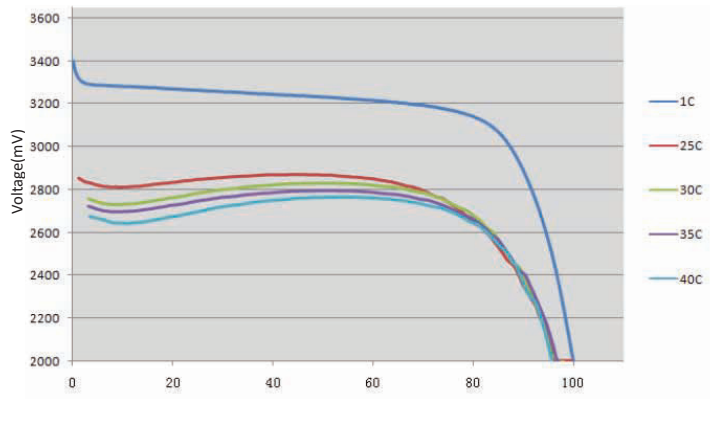

CERTIFICATIONS

UN3480

DRAWINGS

