



FITTING INSTRUCTIONS FOR OCG0040
OIL COOLER GUARD
MV AGUSTA BRUTALE 1000 RR 2020-



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF
OUR DEALERS OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE
WAY OF MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,
THESE RUBBER WASHERS CAN BE THROWN AWAY.

DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM:

WWW.RG-RACING.COM



<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
<ul style="list-style-type: none"> • Metric Allen Key set • Scissors 	<p>M4 BOLT = 8Nm</p> <p>M5 BOLT = 12Nm</p> <p>M6 BOLT = 15Nm</p> <p>M8 BOLT = 20Nm</p> <p>M10 BOLT = 40Nm</p> <p>M12 BOLT = 40Nm</p>

LEGEND

ITEM NO.	DESCRIPTION	QTY
ITEM 1	OCG0040 OIL COOLER GUARD	1
ITEM 2	100mm LENGTH OF SELF-ADHESIVE FOAM	2



IMAGE 1:



IMAGE 2:



IMAGE 3:



IMAGE 4:

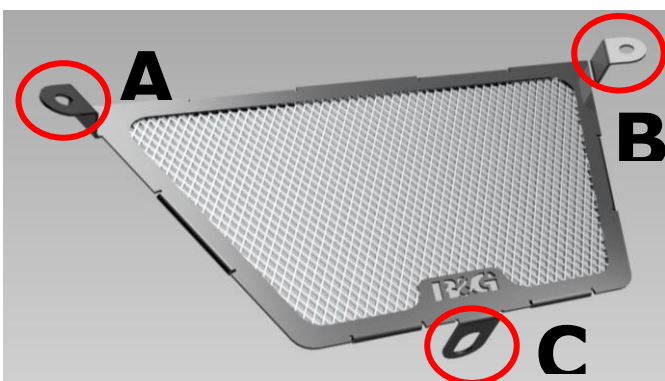


IMAGE 5:



FITTING INSTRUCTIONS

OIL COOLER SHROUD REMOVAL:

- Remove the two mounting bolts located either side of the oil cooler. (**Image 1**)
- Once removed the cooler shroud will be held on by a pin located at the bottom of the oil cooler. (**Image 2**)
- The shroud can be manoeuvred downwards until it is free from the locating pin, at which point it should be carefully set aside until ready for re-installation. (**Image 3**)

OIL COOLER GUARD INSTALLATION:

- Cut & apply the supplied adhesive foam into various positions around the back side of the oil cooler guard.
(This will prevent any rubbing and rattling that may occur due to vibration. Please ensure the guard is free of dirt and oil for optimum adhesion).
- Slot the locating pin (bottom of the oil cooler **Image 2**) into **Tab C (Image 5)**.
- Manoeuvre **Tabs A & B** behind the upper fairing panels and re-install the oil cooler shroud.
- Before fully tightening the shroud's bolts make sure the oil cooler guard is positioned correctly then tighten down to the required torque.

ISSUE 1: 07/04/2021 (TB)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



NOTICE DE MONTAGE OCG0040
PROTECTION REFROIDISSEUR D'HUILE
MV AGUSTA BRUTALE 1000 RR 2020-



CE KIT CONTIENT LES ARTICLES ILLUSTRES ET ETIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ETRE PRESENTES UNIQUEMENT POUR LA CLARTE DES
INSTRUCTIONS.

NE PAS PROCEDER AU MONTAGE TANT QUE VOUS N'ETES PAS SUR QUE TOUTES LES PIECES
SOIENT PRESENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

**EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ
UN DE NOS REVENDEURS OU FAITES APPEL A UN TECHNICIEN
QUALIFIÉ.**

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLE NE REPRESENTE PAS
NECESSAIREMENT LA MANIERE DE LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISEES POUR MAINTENIR LES COMPOSANTS
SUR LES BOULONS, ELLES PEUVENT ETRE JETES.

NOTICE DISPONIBLE AU TELECHARGEMENT SUR :
WWW.RG-RACING.COM



<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE</u>
<ul style="list-style-type: none"> • Clés Allen • Ciseaux 	<p>M4 BOULON = 8Nm</p> <p>M5 BOULON = 12Nm</p> <p>M6 BOULON = 15Nm</p> <p>M8 BOULON = 20Nm</p> <p>M10 BOULON = 40Nm</p> <p>M12 BOULON = 40Nm</p>

LÉGENDE

ARTICLE NO.	DESCRIPTION	QTÉ
ARTICLE 1	OCG0040 PROTECTION REFROIDISSEUR D'HUILE	1
ARTICLE 2	100mm LONGUEUR DE MOUSSE AUTOCOLLANTE	2



IMAGE 1:



IMAGE 2:



IMAGE 3:



IMAGE 4:

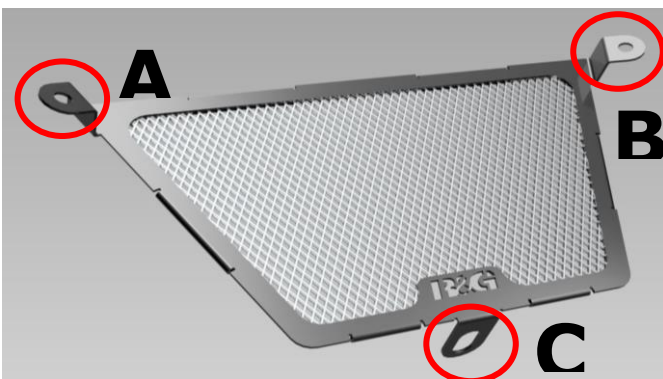


IMAGE 5:



NOTICE DE MONTAGE

INSTALLATION DE LA PROTECTION DU REFROIDISSEUR D'HUILE:

- Coupez et appliquez la mousse adhésive fournie dans différentes positions sur la face arrière de la protection du refroidisseur d'huile).
- Une fois retiré, le carénage du refroidisseur sera maintenu par une goupille située au bas du refroidisseur d'huile. (Image 2).
- Le carénage peut être manoeuvré vers le bas jusqu'à ce qu'il se dégage de la goupille de positionnement, auquel cas il doit être soigneusement mis de côté jusqu'à ce qu'il soit prêt pour la réinstallation. (**Image 3**)

INSTALLATION DE LA PROTECTION DU REFROIDISSEUR D'HUILE:

- Coupez et appliquez la mousse adhésive fournie dans différentes positions sur la face arrière de la protection du refroidisseur d'huile (Cela évitera tout frottement et cliquetis pouvant survenir en raison des vibrations. Veuillez vous assurer que la protection est exempte de saleté et d'huile pour une adhérence optimale).
- Insérez la goupille de positionnement (en bas du refroidisseur d'huile Image 2) dans l'onglet C (Image 5).
- Manoeuvrez les languettes A et B derrière les panneaux de carénage supérieurs et réinstallez le carénage du refroidisseur d'huile.
- Avant de serrer complètement les boulons du carénage, assurez-vous que la protection du refroidisseur d'huile soit correctement positionnée, puis serrez au couple requis

SSUE 1: 07/04/2021 (TB)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com