


Hurricane Saddlebag Instructions

SE-4050

Please read instructions carefully before installation. We recommend this product be installed by a qualified, and experienced motorcycle technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation. Your motorcycle may be different so please use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime, etc. where the product mounts. It is the rider's responsibility to make sure the product is mounted and secure before each use. Loading the bag may result in a change of position. **Always check for proper mounting position after loading and before each and every ride.**


Mounting your bags: It is highly recommended to install these bags on a bike with saddlebag racks or supports.

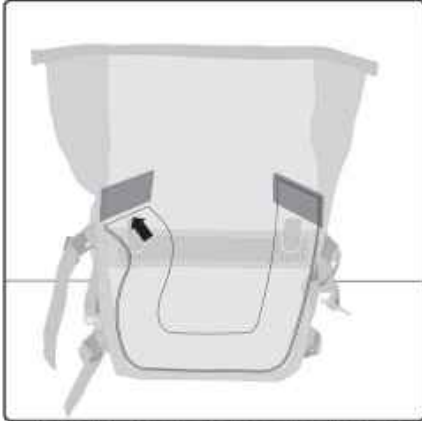

1. Take the included plastic stiffener and place into bag. Insert one end into one of the yellow pockets located on the inside of the bag. Fold back the other end and insert into yellow pocket on opposite side.




2. Pack contents with heavier items at the bottom for better weight distribution and balance. Close the top opening by rolling down a minimum of 3 half turns. You can open the air valve 1/4 turn to allow bag to compress. Be sure to close when done and not over tighten.

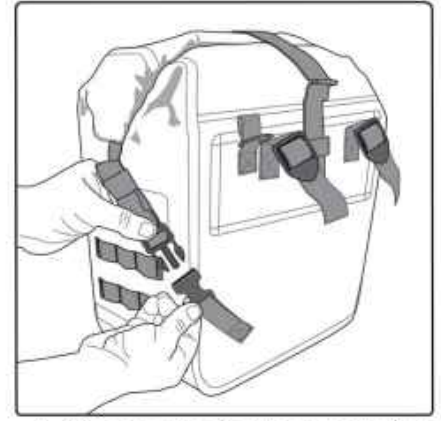


3. Once the top is rolled down tight, connect the buckles as shown and pull tight. You can run these straps over or under the side mounting straps.



4. Position bags over, or if your bike allows, under the seat or rack. Remove the webbing from the strap keepers to make it easier to adjust. Pull all 4 straps to determine the ideal height of the bags. Further adjustment may be necessary once bags are loaded to ensure they do not come into contact with your exhaust or moving bike part(s).

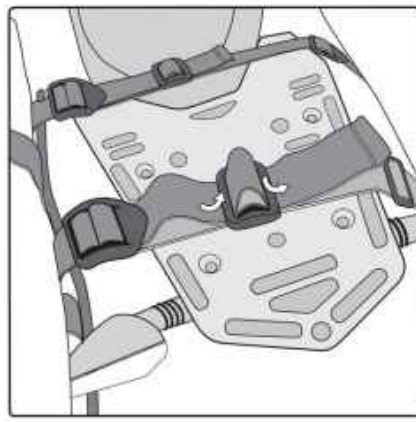

5. Once both saddlebags are in position correctly, pass the end of the straps back through the strap keeper as shown to lock them in place. Sometimes it is easier to take the bags off the bike for this part. Not following this step may cause the strap to become loose over certain terrains and load weight.

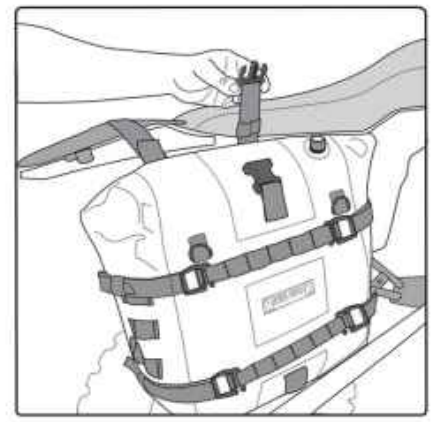

6. Then secure the top compression strap by connecting the buckle and pull tight. This strap has intentionally been left long to attach some of our roll bags creating the ultimate waterproof luggage system.

Warning

Read the installation instructions and make yourself familiar with the process of installing the Rigg Gear product(s) on your vehicle. It is your responsibility to install the product(s) correctly and securely as outlined in these instructions. Rigg Gear products must not be overloaded or over tightened. Failure to adhere to these warnings may result in, but not limited to, the product becoming detached, becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) could lead to serious injury.

Always drive safely. Always wear a helmet and protective apparel.


3518 W Lake Center Drive, Ste. A Santa Ana, CA 92704 USA
Tel (714)850-1811 E-mail: info@nelsonrigg.com www.nelsonrigg.com

RIGG GEAR
ADVENTURE


Hurricane Saddlebag Instructions

SE-4050


Please read instructions carefully before installation. We recommend this product be installed by a qualified, and experienced motorcycle technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation. Your motorcycle may be different so please use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime, etc. where the product mounts. It is the rider's responsibility to make sure the product is mounted and secure before each use. Loading the bag may result in a change of position. **Always check for proper mounting position after loading and before each and every ride.**

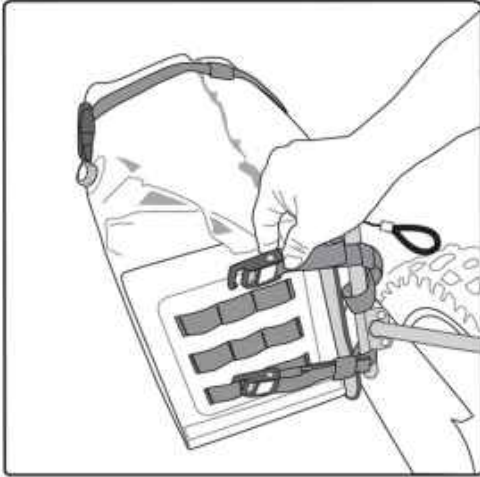

7. Take one of the four Rigg Straps® with a cam hook and pass it around the rack 2 times so the strap holds the rack tight and minimizes any slippage. Then attach to one of the MOLLE loops on the side or front of the bag and pull to secure but do not over tighten. When installed correctly, the side straps hold the bags against the rack and do not come under heavy load. Feed loose straps into the provided elastic strap keepers or trim to fit as needed.

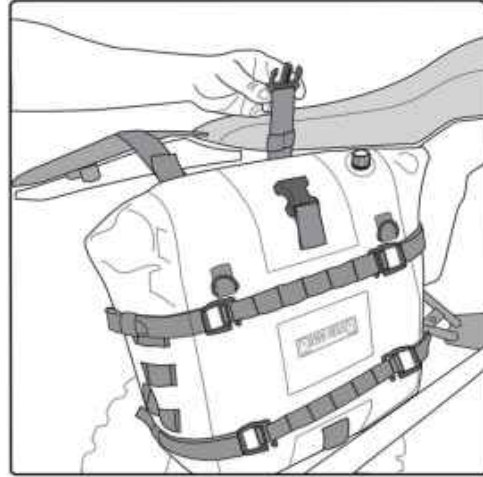

8. When using without the internal stiffener for smaller loads or for a lower profile set up, connect the side cam hooks to one of the MOLLE loops on the front of the bag and pull straps to compress to your load. Then pull on the top strap to cinch up the bottom of the bag. Feed loose straps into the provided elastic strap keepers or trim to fit as needed.

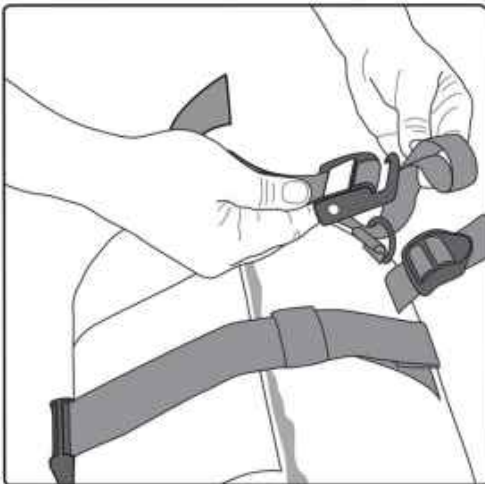

9. To attach our 10L Hurricane roll bags to our Saddlebags, loop one of the four Rigg Straps® around a D-ring on the back side of the saddlebag. Pass the cam hook through the loop on the long strap end and pull to secure. Repeat with other 3 straps.



10. Then pass the cam hook through the large loops located on the roll bag and hook through the webbing loops on the front side of the saddlebag. Then connect the center strap with buckle over the roll bag and pull all straps tight.

Warning

Read the installation instructions and make yourself familiar with the process of installing the Rigg Gear product(s) on your vehicle. It is your responsibility to install the product(s) correctly and securely as outlined in these instructions. Rigg Gear products must not be overloaded or over tightened. Failure to adhere to these warnings may result in, but not limited to, the product becoming detached, becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) could lead to serious injury.

Always drive safely. Always wear a helmet and protective apparel.

3518 W Lake Center Drive, Ste. A Santa Ana, CA 92704 USA
Tel (714)850-1811 E-mail: info@nelsonrigg.com www.nelsonrigg.com

RIGG GEAR
ADVENTURE