





**FITTING INSTRUCTIONS FOR CP0252BL/WH AERO CRASH PROTECTORS
HONDA CBF600 SPORT LIMITED EDITION 08'-**

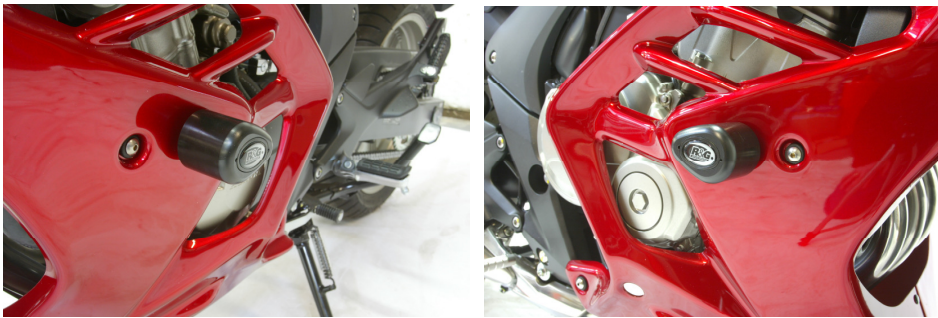

TOWARDS REAR
OF BIKE

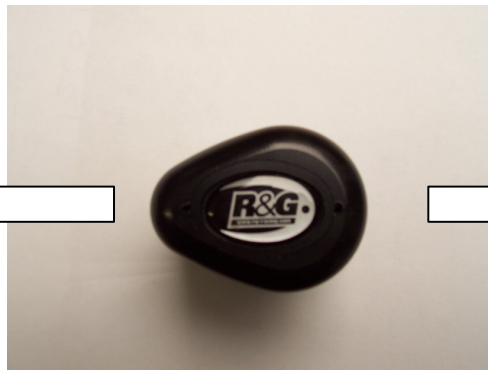

TOWARDS FRONT
OF BIKE



Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

You will need the following tools to complete this job.

Set of metric allen keys.

Socket set to include 17mm and 19mm A/F socket and wrench.

Torque wrench to be used at 40NM.

Left-hand side (as you sit on bike)

- Remove lower fairing.
- Remove the front engine bolt.
- Screw in the marking tool provided so when fairing is offered into position the inside of fairing is just clear of the point.

R&G Racing
Unit 5K, Blacknest Industrial Park, Blacknest Road, Alton, Hampshire, GU34 4PX
Tel: +44 (0)870 220 6380 Fax: +44 (0)1420 521101 www.rg-racing.com Email: info@rg-racing.com



- Offer the fairing back into position.
- With a closed fist give the fairing a couple of taps so that the marking tool marks the position on inside face of fairing.
- Remove the fairing.
- Using a 28mm tank/cone cutter drill through the fairing with the pilot drill only using the mark to find the centre position of engine bolt.
- Replace the fairing and ensure the pilot hole is central to the engine mount hole.
- Remove the fairing and while supporting it carefully drill through fairing from the outside with the tank cutter.
- Deburr the hole and ensure the smaller spigot of crash protector fits through hole.
- Remove the marking tool.
- Replace the fairing.
- Install the longer M12 (140mm) bolt with a washer, followed by a shake proof washer, into the protector counter bore, place the longer spacer over the free end of bolt and install the assembly through drilled hole and into the engine mounting hole (ensure the engine to fame spacer is still in correct position) and tighten bolt until you feel some compression from inside the protector.
PLEASE NOTE BOBBIN MUST BE POSITIONED AS PICTURED ABOVE WITH BIGGER END TOWARD FRONT OF BIKE. Turn a little more so that you feel the compression increase slightly. Then apply a quarter turn. Do not overtighten as damage can occur to the bike. Do not exceed 40nm of torque.
- Insert bobbin cap so logo is as shown above.

Right-hand side (as you sit on bike)

- Remove lower fairing.
- Remove the front engine bolt.
- Screw in the marking tool provided so when fairing is offered into position the inside of fairing is just clear of the point.
- Offer the fairing back into position.
- With a closed fist give the fairing a couple of taps so that the marking tool marks the position on inside face of fairing.
- Remove the fairing.
- Using a 28mm tank/cone cutter drill through the fairing with the pilot drill only using the mark to find the centre position of engine bolt.
- Replace the fairing and ensure the pilot hole is central to the engine mount hole.
- Remove the fairing and while supporting it carefully drill through fairing from the outside with the tank cutter.
- Deburr the hole and ensure the smaller spigot of crash protector fits through hole.
- Remove the marking tool.
- Replace the fairing.
- Install the shorter M12 (120mm) bolt with a washer, followed by a shake proof washer, into the protector counter bore, place the shorter spacer over the free end of bolt and install the assembly through drilled hole and into the engine mounting hole (ensure the engine to fame spacer is still in correct position) and tighten bolt until you feel some compression from inside the protector.
PLEASE NOTE BOBBIN MUST BE POSITIONED AS PICTURED ABOVE WITH

R&G Racing

Unit 5K, Blacknest Industrial Park, Blacknest Road, Alton, Hampshire, GU34 4PX

Tel: +44 (0)870 220 6380 Fax: +44 (0)1420 521101 www.rg-racing.com Email: info@rg-racing.com



BIGGER END TOWARD FRONT OF BIKE. Turn a little more so that you feel the compression increase slightly. Then apply a quarter turn. Do not overtighten as damage can occur to the bike. Do not exceed 40nm of torque.

- Insert bobbin cap so logo is as shown above.

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in resellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.