

INSTALLATION INSTRUCTIONS

COMFORT DROP MOUNTS/MINI BOARDS FOR GL 1800

7564

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- | | | | |
|---|---|---|--------------------------|
| 1 | Right Mini Board and Comfort Drop Mount—Black | | |
| 1 | Left Mini Board and Comfort Drop Mount—Black | 1 | Hardware Kit Containing: |
| 1 | Installation Instructions | 2 | Cotter Pins |


YOU WILL ALSO NEED:

Needle Nose Pliers, Set of Hex Wrenches

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.


NOTE: Pictures shown of Chrome parts. Installation of Black parts will be the same.

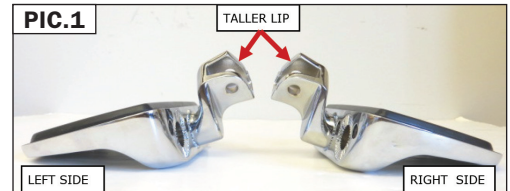

WARNING YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

STEP 2 Determine the left from the right (sitting on bike) Drop Mount. PIC 1 The taller, sharp corner lip goes towards the front of the bike.

STEP 3 Remove the stock pegs from the OEM mounts by removing the cotter pin and washer from the bottom of the mounting pin. PIC 2 Carefully remove the pin, watching how the spring is connected to the peg and the hole in the mount. PIC 3 Keep all these parts except the cotter pin, they will be reused.

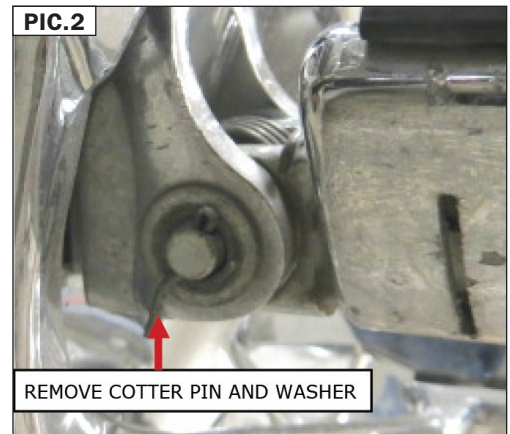

STEP 4 Reconnect the new Comfort Drop Mount and Mini Board to the mount, making sure that the spring is in the proper position. Drop the mounting pin back into position and secure with the OEM washer and included cotter pin. PIC 4 Check to make sure that your peg pivots up freely.

WARNING FOOTPEGS MUST BE INSTALLED SO THEY WILL FOLD UPWARD AND REARWARD IF HIT BY ANY OBJECT. FAILURE TO ADJUST THE FOOTPEGS TO OPERATE IN THIS MANNER COULD RESULT IN SERIOUS INJURY OR DEATH.

KURYAKYN.COM

866 277 9598 | INFO@KURYAKYN.COM
454 COUNTY ROAD VV SOMERSET, WI 54025

INSTALLATION INSTRUCTIONS

COMFORT DROP MOUNTS/MINI BOARDS FOR GL 1800

7564

-CONTINUED-




DO NOT USE THE REARWARD MOUNTING HOLE IN THE MINI BOARDS. USING THIS POSITION WILL MOVE THE BOARD TOO FAR FORWARD AND MAY ALLOW YOUR FOOT TO BECOME LODGED BETWEEN THE BOARD AND THE SHIFT LEVER. THIS MAY CAUSE LOSS OF CONTROL RESULTING IN SERIOUS INJURY OR DEATH.

NOTE: If leaving the Mini Boards in the factory installed position on the Comfort Mount, tighten the socket head cap screw that attaches the Mini Board (PIC 5) to the Comfort Mount before riding the motorcycle.

STEP 5 To change the position of the Mini Board rearward, remove the socket head capscrew that attaches the Mini Board to the splined adapter. PIC 5 Insert the socket head cap screw into the forward hole on the Mini Board and thread it into the splined adapter. Make sure the splines on the Mini Board are engaged on the splines on the adapter in the desired position and tighten securely.

STEP 6 To change the tip-up or tip-down position of the Mini Boards, loosen the socket head cap screw far enough to allow the splines on the Mini Board and adapter to disengage. Move the Mini Board to the desired position, and making sure the splines on the board and adapter are engaged in that position, tighten the socket head cap screw securely.

NOTE: If the Mini Boards do not seem parallel after tightening in the desired orientation, they can be fine tuned by loosening the two footpeg mount fasteners and rotating the peg mount forward or backward to achieve the desired position. PIC 6

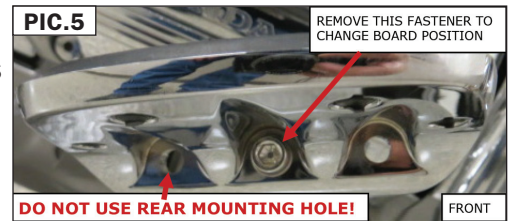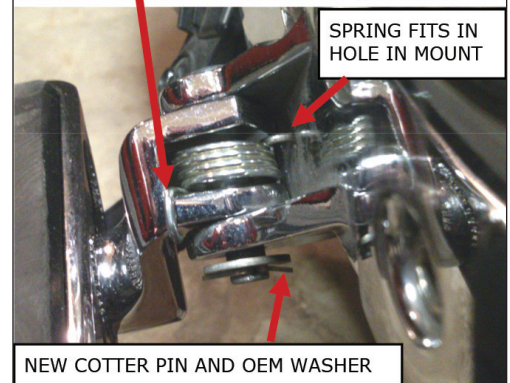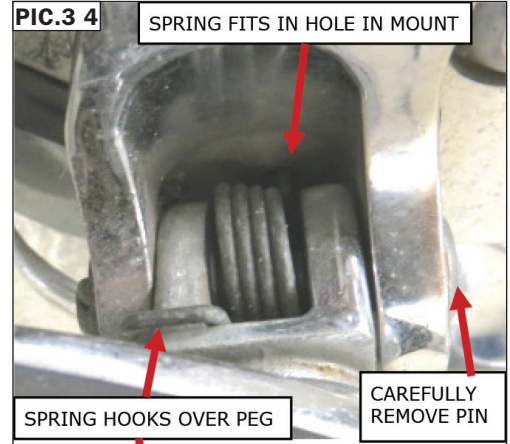

WARNING

IT IS THE INSTALLERS RESPONSIBILITY TO ENSURE THERE IS SUFFICIENT CORNERING CLEARANCE BEFORE THE MOTORCYCLE IS RIDDEN. INSUFFICIENT CORNERING CLEARANCE MAY CAUSE LOSS OF CONTROL RESULTING IN SERIOUS INJURY OR DEATH.

INSTALLATION INSTRUCTIONS

COMFORT DROP MOUNTS/MINI BOARDS FOR GL 1800


7564

-CONTINUED-

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

PIC.6

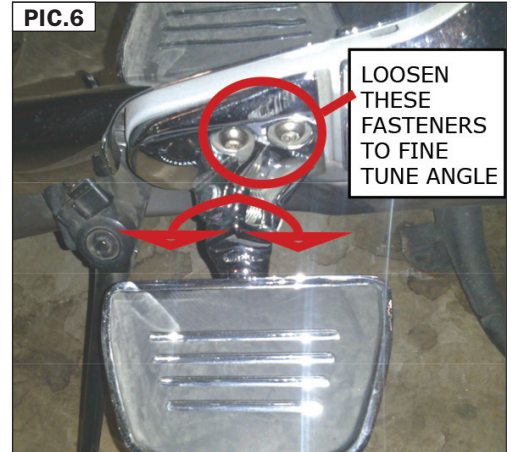

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice

KURYAKYN.COM

866 277 9598 | INFO@KURYAKYN.COM

454 COUNTY ROAD VV SOMERSET, WI 54025

